

# **The Draco<sup>TM</sup>**

## **FP3220 Series**




# **SPECIFICATION SHEET**



*Product Specifications subject to change*

# The Draco™ Fan Assembly – FP3220\*\*

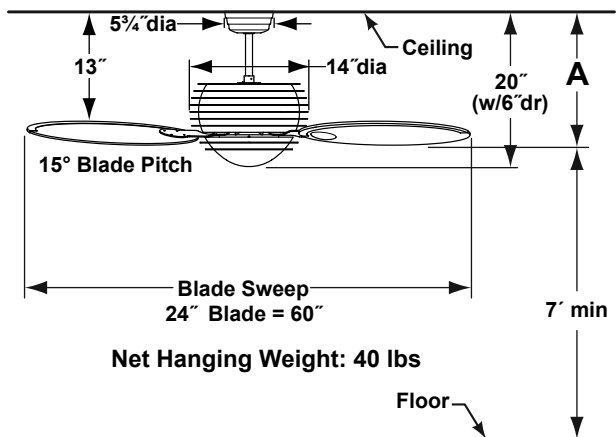

*Dimensions shown in inches*

| Available Finishes |              |
|--------------------|--------------|
| CH                 | Chrome       |
| GB                 | Glossy Black |

| Fan Assembly      | A   |
|-------------------|-----|
| Fan w/6" downrod  | 16" |
| Fan w/12" downrod | 22" |
| Fan w/18" downrod | 28" |
| Fan w/24" downrod | 34" |
| Fan w/36" downrod | 46" |
| Fan w/48" downrod | 58" |
| Fan w/60" downrod | 70" |
| Fan w/72" downrod | 82" |

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 3 fan speeds with reversing switch (on top of the motor).

**Fan Speeds:** Low – 75 rpm; Med – 100 rpm; High – 150 rpm

## CONTROL OPTIONS:

The hand-held remote control (C24) and canopy-style receiver unit (RECAN68) are included. Pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, and off button. Reversing switch located inside fan housing on upper socket housing. Installation and operating instructions provided with control.

## LIGHTING OPTIONS:

The 3-bulb (40 watt max) downlight fixture is included with this fan assembly (candelabra bulbs - not included). Maximum wattage of downlight not to exceed 120 watts.

## DOWN ROD OPTIONS:

The Draco™ fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Draco™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

## BLADE SETS:

A set of 3 plastic blades are included with this fan.

## DAMP LOCATION:

Fan not rated for Damp Location usage.



**10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113  
Visit Our Website [www.fanimation.com](http://www.fanimation.com)**

